



● **FEATURES 特性**


1. Semi-enclosed ferrite core, less magnetic leakage, good EMI performance;
2. High impedance, open structure, good heat dissipation effect;
3. General purpose materials, low cost, quick delivery;
4. Automatic production ensures high quality and consistency.

● **APPLICATIONS 用途**


1. AC-DC and DC-DC adapters are available and can also be used as filters
2. Widely used in low power supply and LED driver.
3. We can customize products according to your requirements. Please consult our sales.

● **PART NUMBERING SYSTEM 品名系统**

ACKEE 13- 1mH / Min - □□□□

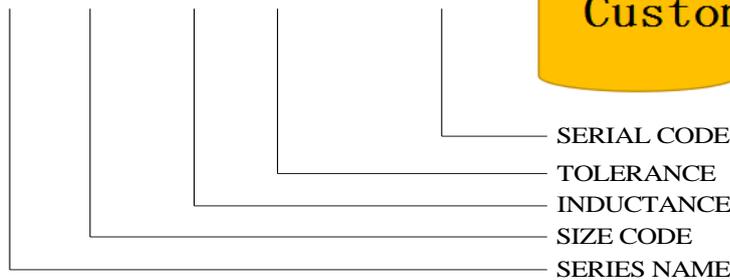

● **SHAPES AND DIMENSIONS 外形尺寸 (Unit:mm)**

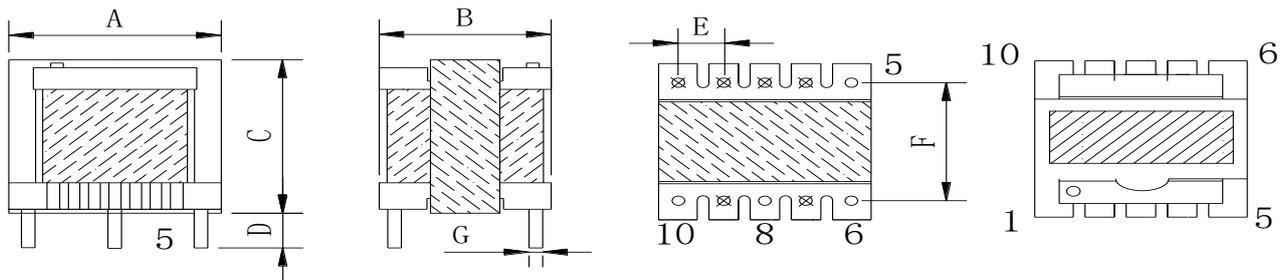

TYPE(型号)	A	B	C	D	E	F	G
ACKEE16	19.0Max	19.5Max	17.5Max	4.0±0.5	3.2±0.5	15.5±0.5	0.7±0.1
ACKEE19	20.5Max	17.5Max	20.0Max	4.0±0.5	3.9±0.5	13±0.5	0.7±0.1
ACKEE22	23.5Max	17.5Max	20.0Max	4.0±0.5	4±0.5	10.3±0.5	0.8±0.1

